

UW5757D

Product Family	Dishwasher
Subfamily	Utensilwasher
Type	Utensil dishwasher
Crockery	Crockery; Cutlery; EN 600x400 trays; GN1/1 trays; Utensils
Basket dimensions	570x570 mm
Rinse pump	HTR system
Wash pump	Standard
Default power supply	400 V 3N~ / 22,7 A / 9,0 kW / 50 Hz
Dimensions	685x750x1710 mm



Target

Industries	Hotels; Ristoranti / Catering; Bakeries / Pastry shops; Food Industries; Care facilities ; Grocery shops / Food retail; Catering; Commercial food services; Butcher shops / Delicatessens
-------------------	---

Aesthetics

Led colour	Red
-------------------	-----

Technical Features

Trays washing option	Yes	Detergent flow rate	1.5 l/h
Water consumption per cycle	5 l	Rinse aid flow rate	0.4 l/h
Wash temperature (min-max)	60 °C	Usable load height	650 mm
Rinse temperature (min-max)	78°C	Height with door open	1985 mm
Warm water connection	8°C	Depth with door open	1110 mm
Max. inlet temperature	60°C	Maximum height with no-basket washing	650 mm
Max water hardness	8°f-5dh / 14°f-8dh		

Programmes

Program table

Utensil washer programs

Utensil washer

1- 120" (92" at 60°C - rinse 18" at 85°C); 2- 240" (212" at 60°C - 10" dripping pause - rinse 18" at 85°C); 3- Endless at 60°C - 10" dripping pause - rinse 18" at 85°C

Maximum baskets/hour

30

Electrical Connection

Tank heating element power 4500 W

Boiler heating element power 7500 W

UW wash pump power 1600W

Default connection 9000 W

Electrical connection options 230 V 3~ / 39,5 A / 9,0 kW / 50 Hz

Plug No

Interface

Display 4 digit

Number of buttons 3

On/off indicator Yes

Construction

Tank With printed base

Construction Single skinned

Tank material Stainless steel AISI 304

Back panel Galvanized

Upper washing system One washing and one split rinse spray arms, stainless steel

Lower washing system A 3-arms washing and one split rinse spray arms, stainless steel

Tank filter Stainless steel

Rack guides Welded

Filter 2-stages filter system

Wash tank capacity 36 l

Boiler capacity 12 l

Boiler type Artmosferic boiler

Noise level Lpa 51,7 dBA

Protection class IPX4

Adjustable feet Yes

Drain max. height 800 mm

Accessories Included

Flat basket WB5757G01

Water supply pipe Yes - 2,5m

Drain pipe Yes - 2m

Equipment

Peristaltic detergent dispenser Yes, manual

Peristaltic rinse-aid dispenser Yes, manual

Rinse boiler Thermostop system Yes - default

Wash pump soft start system Yes

Water supply pipe diameter 16 mm


Drain supply pipe diameter 21.5 mm

Detergent (red) hose length Yes, manual

Break tank	Yes	Rinse aid (blue) hose length	Yes, manual
------------	-----	------------------------------	-------------

Logistic Information

EAN code	8017709207946	Net weight (kg)	135,000 kg
Packed product dimensions (WxDxH)	1910x860x820 mm	Gross weight (kg)	161,000 kg

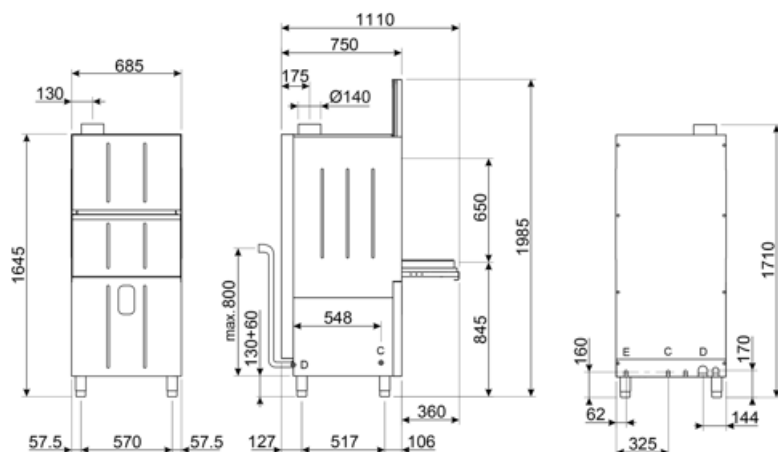

D = SCARICO 1/2", VIBANGE 1/2", DRAIN 1/2", ABFLUSS 1/2", DESAGÉE 1/2", CIBB 1/2"

C = CARICAMENTO ACQUA 1/2" GAS, CHARGEMENT EAU 1/2" GAZ, WATER INLET 1/2" GAS, ZUFLUSS 1/2" GAS, CARGA AGUA 1/2" GAS, HAROP BOZIM 1/2" GAS

E = ALLACCIAMENTO ELETTRICO, BRANCHEMENT ELECTRIQUE, ELECTRIC CONNECTION, ELEKTRISCHER ANSCHLUSS, CONEXION ELECTRICA, ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ

Compatible Accessories



WB5757G01

Universal basket with flat bottom for
utensilwasher



WB5757T01

Stainless steel basket for 5
utensilwasher trays




WB5757T02

Stainless steel basket for 8
utensilwasher trays



WH00B02

Block for utensilwasher saccapoché



WH00S02

Basket for utensilwasher tools

Benefit

Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

2-stage system

Two-stage filtration system to ensure optimal washing performance and maximum water purity.

The filtration system is entirely made of AISI 304 stainless steel, ensuring maximum resistance, durability, and corrosion protection. It consists of two filtration stages: the first features a grid that prevents dirt residues from entering the tank, thereby avoiding water clouding; the second protects the washing pumps by retaining any debris that may accidentally enter the tank during filter cleaning.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Door

Split and balanced doors for maximum ergonomics, with double-skin construction

The split, balanced doors are designed to ensure maximum ergonomics during the loading and unloading of utensils, making the process easier and minimising operator effort. Furthermore, the double-skin construction not only provides a robust structure but also ensures excellent thermal and acoustic insulation, helping to maintain a consistent internal temperature and reduce noise levels during operation, further enhancing the user experience.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.