



## Digital Undercounter Refrigerated Counter - 3 Door (R290) with top and wheels, UK plug



710450 (EJ3HBAAAXG)

3-door Refrigerated Counter, -2+10°C, AISI 304 (R290), with wheels - UK plug

### Short Form Specification

#### Item No.

AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. Worktop thickness 50mm. N. 3 full doors. Built-in refrigeration unit. Operating temperature: -2+10°C. R290 gas in refrigeration circuit. Supplied with 1 grid for each door compartment

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_

### Main Features

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Operating temperature can be adjusted from -2 to +10 °C to suit different food storage requirements.
- Complies with main international certification bodies and is CE marked.
- Kit 1/2 drawers available as accessory.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.
- Forced air cooling system guaranteeing great uniformity of the temperature in the counter and excellent conservation of the food quality.
- Kit 1/3 drawers available as accessory.
- Tropicalized unit.

### Construction

- Built-in compressor to suit operating conditions.
- Legs in 304 AISI stainless steel (150 mm high, adjustable in height), with plastic interior.
- Internal and external structure, bottom, doors, front and side panels, base and 50mm thick removable worktop in stainless steel.
- Back panel in galvanized steel.
- The door self-closes when opened less than at a 90° angle and is equipped with a door seal to guarantee perfect closure.
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids.

### Included Accessories

- 3 of Kit 1/1 grey rilsan grid and 2 side runners for refrigerated counters

### Optional Accessories

• 1/1GN grey rilsan grid for refrigerated counters	PNC 881107	<input type="checkbox"/>
• 2 side runners for 1/1 GN ecostore refrigerated counters	PNC 881108	<input type="checkbox"/>
• Kit 1/1 grey rilsan grid and 2 side runners for refrigerated counters	PNC 881109	<input type="checkbox"/>
• 1/1 GN plastic container, H=65 mm	PNC 881110	<input type="checkbox"/>
• 1/1 GN plastic container, H=100 mm	PNC 881111	<input type="checkbox"/>
• 1/1 GN plastic container, H=150 mm	PNC 881112	<input type="checkbox"/>
• 2x1/2 drawer kit for refrigerated counters - h650mm	PNC 881176	<input type="checkbox"/>
• 3x1/3 drawer kit for refrigerated counters - h650mm (only for refrigerated counters)	PNC 881177	<input type="checkbox"/>
• 1/3 and 2/3 bottle drawer kit for refrigerated counters - h650mm (only for refrigerated counters)	PNC 881178	<input type="checkbox"/>
• Kit 4 wheels, H=100 mm (2 with brakes) for refrigerated counters	PNC 881191	<input type="checkbox"/>

APPROVAL:



Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)



## Digital Undercounter Refrigerated Counter - 3 Door (R290) with top and wheels, UK plug

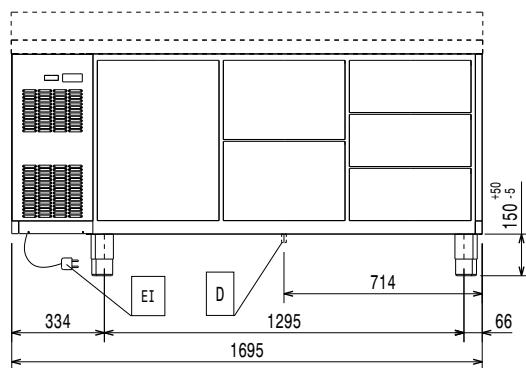
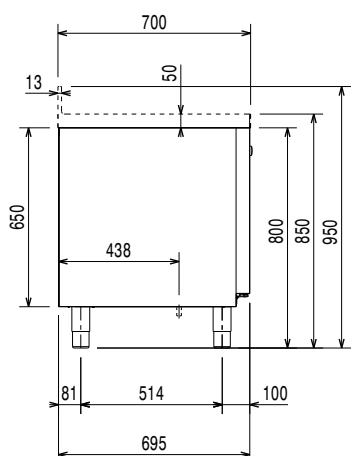
- Kit 4 wheels, H=150 mm (2 with brakes) for 2&3 compartment refrigerated counters PNC 881193
- Lock for refrigerator/freezer counters with 3 compartments - h650mm (can be used in kit for Marine conversion) PNC 881246
- Kit 4 (45mm) spacers for wheels for refrigerator/freezer counters PNC 881277
- IoT module for refrigerated cabinets and counters PNC 881298

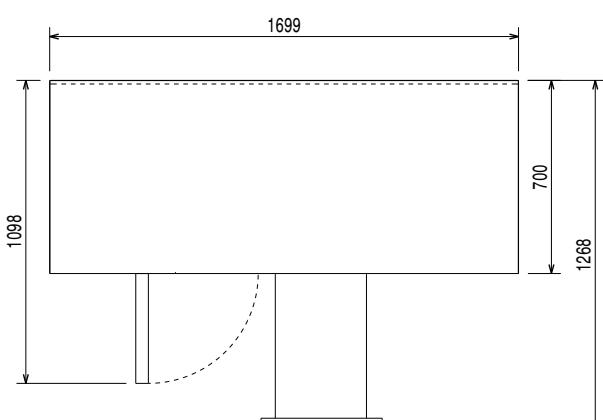


Digital Undercounter  
Refrigerated Counter - 3 Door (R290) with top and wheels, UK plug

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.11.14

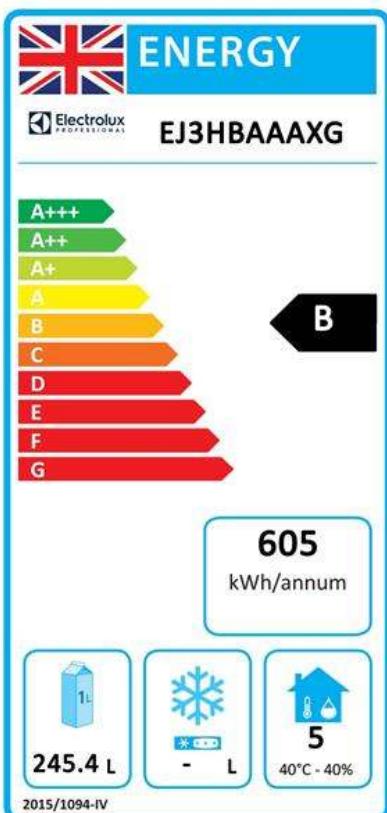
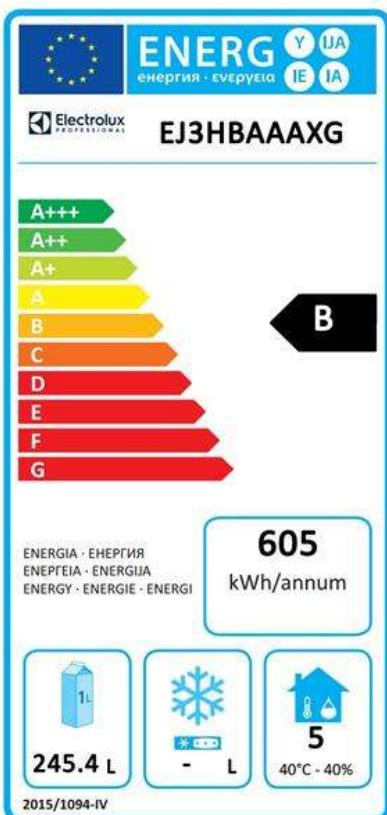

**Front**

**Side**
**EI** = Electrical inlet (power)

**Top**

**Electric**
**Supply voltage:** 220-240 V/1 ph/50 Hz  
**Electrical power, max:** 0.22 kW

**Key Information:**
**Net Volume:** 245.4 lt  
**Nº of doors:**  
**External dimensions, Width:** 1699 mm  
**External dimensions, Depth:** 700 mm  
**External dimensions, Height:** 850 mm  
**Internal Dimensions, Width:** 1252 mm  
**Internal Dimensions, Depth:** 560 mm  
**Internal Dimensions, Height:** 510 mm  
**Net weight:** 114 kg  
**Shipping volume:** 1.44 m<sup>3</sup>  
**Depth with doors open:** 1310 mm  
**Gross capacity:**
**Refrigeration Data**
**Control type:** Digital  
**Min/Max internal humidity:** 40/85  
**Operating temperature min.:** -2 °C  
**Operating temperature max.:** 10 °C  
**Compressor power:** 1/4 hp  
**Operating mode:** Ventilated  
**Insulation:** 90 mm (Cyclopentane)

**ISO Certificates**
**ISO Standards:** ISO 9001; ISO 14001; ISO 45001; ISO 50001

**Sustainability**
**Refrigerant type:** R290  
**GWP Index:** 3  
**Refrigeration power:** 320 W  
**Refrigerant weight (unit 1):** 65 g  
**Energy Class (EU Reg. 2015/1094):** B  
**Yearly and daily energy consumption (EU Reg. 2015/1094):** 605kWh/year - 2kWh/24h  
**Climate class (EU Reg. 2015/1094):** Heavy Duty (5)  
**Energy Efficiency Index-EEI (EU Reg. 2015/1094):** 25,03



**EU energy labelling from 1st July 2016**

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU.

These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.